



# DSG800 Series

## RF Signal Generator

Highly cost-effective economical RF signal generator

- Up to -105 dBc/Hz (typical) phase noise
- Up to +20 dBm (typical) maximum output power
- Higher level of amplitude accuracy, up to 0.5 dB (typical)
- Superb signal stability

Functions almost matching those of high-level RF signal generators

- Flexible frequency and amplitude sweep functions
- Complete AM/FM/ØM analog modulation functions
- Standard LF output function
- Powerful pulse modulation function
- Open vector modulation function
- System flatness calibration function
- Simple and easy to operate

Special design ensuring its reliability and durability

- Use electronic attenuator to avoid wearing
- Specially designed protection functions
- Digital ALC circuit
- Simple structure


Smallest in size among the like products

- Occupy the least workbench space
- Occupy less rack space
- Light weight; the handle offers comfortable grip




Spectral Purity <sup>[3]</sup>			
		DSG815	DSG830
Harmonic	CW mode, $1 \text{ MHz} \leq f \leq 3 \text{ GHz}$ , level $\leq +13 \text{ dBm}$	< -30 dBc	
Non-harmonic	CW mode, level $> -10 \text{ dBm}$ , carrier offset $> 10 \text{ kHz}$		
	$100 \text{ kHz} \leq f \leq 1.5 \text{ GHz}$	< -60 dBc, < -70 dBc (typ.)	< -60 dBc, < -70 dBc (typ.)
	$1.5 \text{ GHz} < f \leq 3 \text{ GHz}$		< -54 dBc, < -64 dBc (typ.)
SSB phase noise	CW mode, carrier offset = 20 kHz, 1 Hz measurement bandwidth		
	$100 \text{ kHz} \leq f \leq 1.5 \text{ GHz}$	< -100 dBc/Hz, < -105 dBc/Hz (typ.)	< -100 dBc/Hz, < -105 dBc/Hz (typ.)
	$1.5 \text{ GHz} < f \leq 3 \text{ GHz}$		< -94 dBc/Hz, < -99 dBc/Hz (typ.)
Residual FM	CW mode, RMS value at $f = 1 \text{ GHz}$		
	$0.3 \text{ kHz}$ to $3 \text{ kHz}$	< 10 Hz rms, < 5 Hz rms (typ.)	
	$0.03 \text{ kHz}$ to $20 \text{ kHz}$	< 50 Hz rms, < 10 Hz rms (typ.)	

Measured at 0 dBm, harmonics vs. frequency

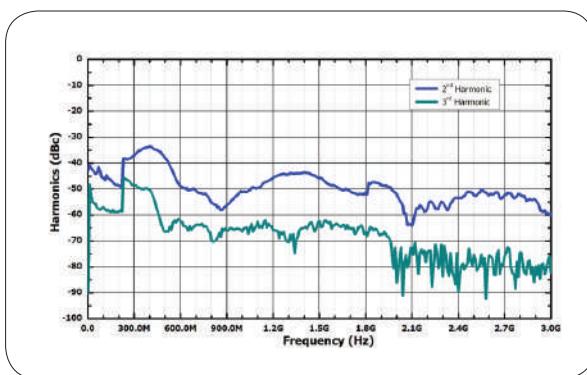

Measured SSB phase noise

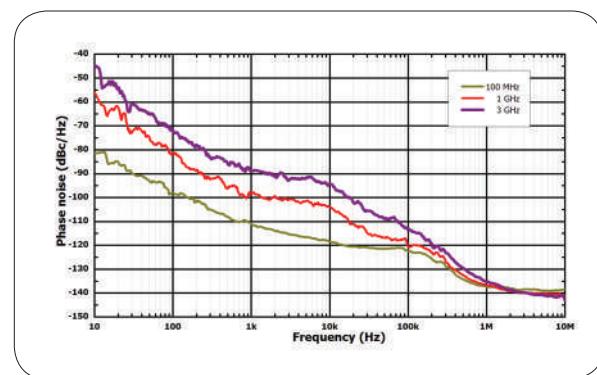

Note:


[1] Time from receipt of SCPI command or trigger signal to within 0.1 ppm of final frequency (final frequency  $\geq 227.5 \text{ MHz}$ ) or within 100 Hz (final frequency  $< 227.5 \text{ MHz}$ ).

[2] N is a factor used to help define certain specifications within the manual.


[3] Without option DSG800-IQ.




**Measured at +13 dBm,level error vs.frequency**

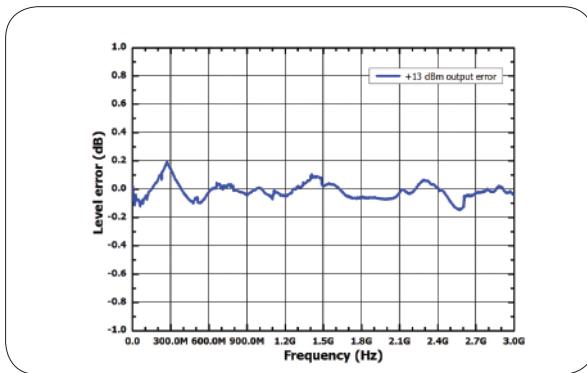


**Measured at 0 dBm,level error vs.frequency**

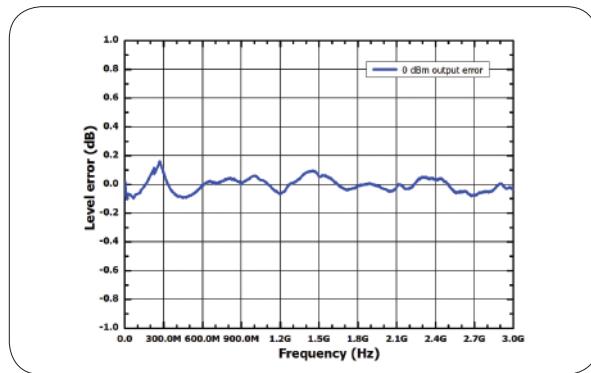


**Measured at -20 dBm,level error vs.frequency**

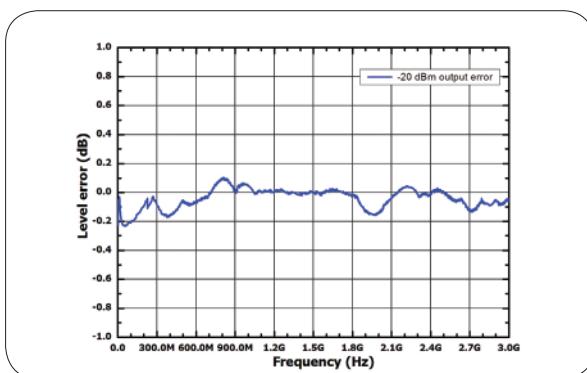


**Measured at -60 dBm,level error vs.frequency**

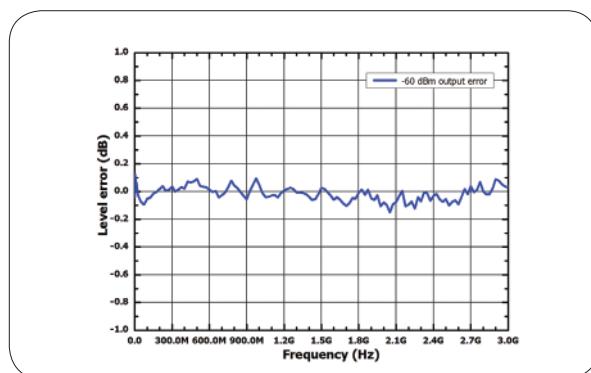


**Measured at -90 dBm,level error vs.frequency**

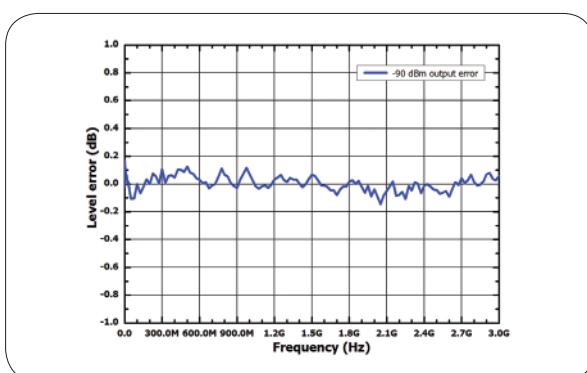


**Measured at -110 dBm,level error vs.frequency**

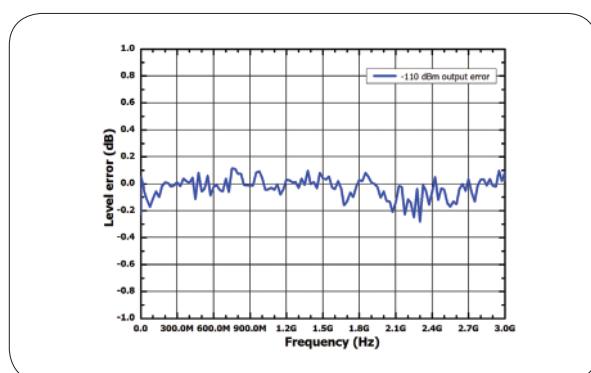

**Measured VSWR vs.frequency**

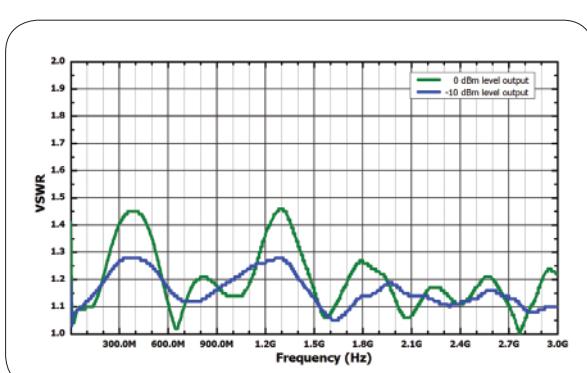

**Measured level repeatability @ 1 GHz,0 dBm**

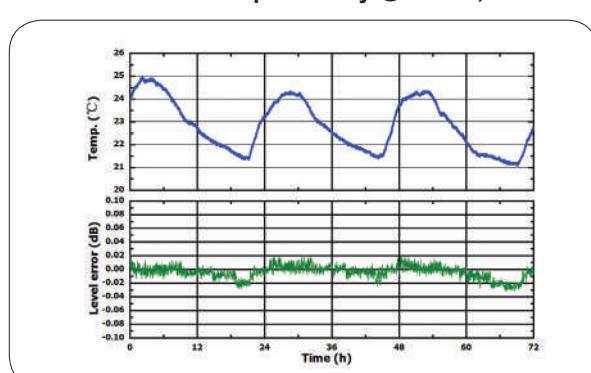







I/Q Baseband Generator (Option DSG800-IQ)			
Output impedance	50 Ω (nom.)		
Output voltage	Setting range	0.02 V <sub>p</sub> to 1.5 V <sub>p</sub>	
	Resolution	1 mV	
Frequency response	Reference: 1 MHz	≤ 10 MHz	< 0.5 dB (nom.)
		≤ 30 MHz	< 1 dB (nom.)
I/Q imbalance	Amplitude	≤ 10 MHz	< 0.1 dB (nom.)
		≤ 30 MHz	< 0.2 dB (nom.)
	Nonlinear phase	≤ 10 MHz	200 ps (nom.)
		≤ 30 MHz	500 ps (nom.)
SFDR	Sine	≤ 30 MHz	> 50 dB (nom.)
	Waveform length		1 sample to 16 Msample in one-sample steps
Waveform memory	Resolution		14 bits
	Loading time (1 Msample)		< 10 s <sup>[7]</sup> (nom.)
	Non-volatile memory		96 MB (nom.)
Sample rate	Setting range		1 kHz to 50 MHz
	Resolution		0.01 Hz
	Trigger mode		Auto, key, external, bus (USB, LAN)
	Operation mode		Retrig, arm auto, arm retrig, single
Trigger	External trigger delay		
	Setting range	0 to (2 <sup>16</sup> - 1)	
	Resolution	1	
	External trigger inhibit		
	Setting range	0 to (2 <sup>16</sup> - 1)	
	Resolution	1	
	External trigger pulse width		> 20 ns (nom.)

Measured internal IQ bandwidth

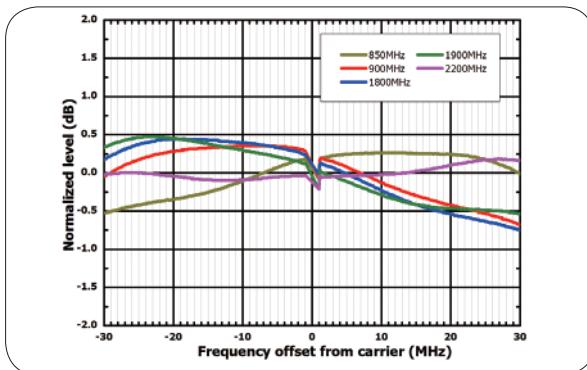

Measured external IQ bandwidth

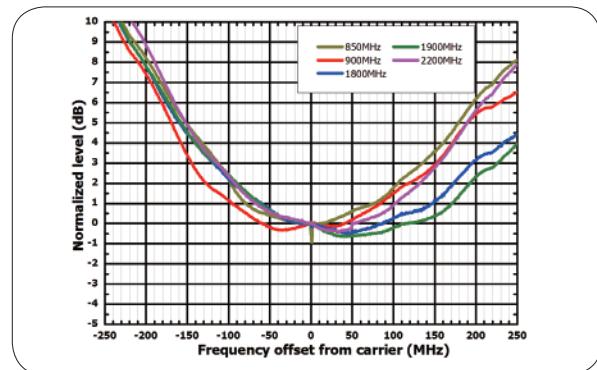

Note:

[1] Unless otherwise noted, the modulation source is sine. The temperature range is from 20°C to 30°C , carrier frequency  $\geq$  1 MHz.

[2] The envelop peak power is no greater than the maximum value of the specification output range.

[3] External modulation, measured at 100 kHz deviation.

[4] External modulation, measured at 5 rad deviation.

[5] The parameter is measured under room temperature. When the temperature is different from the room temperature, the specification will deteriorate.

[6] Baseband frequency  $\leq$  10 MHz.

[7] Load from the flash of the internal non-volatile memory.





## ► Ordering Information

	Description	Order Number
Models	RF Signal Generator, 9 kHz to 1.5 GHz	DSG815
	RF Signal Generator, 9 kHz to 3 GHz	DSG830
Standard Accessories	Quick Guide (Hard Copy)	--
	Power Cable	--
Options	I/Q Modulation, Baseband Output <sup>[1]</sup>	DSG800-IQ
	Pulse Modulation, Pulse Generator	DSG800-PUM
	Pulse Train Generator <sup>[2]</sup>	DSG800-PUG
	High Stable Reference Clock	OCXO-B08
	Rack Mount Kit (For one Instrument)	RM-1-DG1000Z
	Rack Mount Kit (For two Instruments)	RM-2-DG1000Z

Note: [1] The option should be installed before leaving the factory. For after-sales, you need to send the instrument back to the factory to install the option.

[2] The option DSG800-PUM will be installed automatically after this option is installed.

## INDONESIA

### PT. Unitronic Jaya

Jl. Batununggal Indah IV No. 75  
 Bandung 40266 - Jawa Barat, Indonesia  
 Tel : +62 - 22 - 7514564;  
 Fax : +62 - 22 - 7538688  
 Email : sales@unitronicjaya.com  
 Web : www.unitronicjaya.com

### HEADQUARTER

**RIGOL TECHNOLOGIES, INC.**  
 No.8 Keling Road, New District,Suzhou,  
 JiangSu,P.R.China  
 Tel:+86-400620002  
 Email:info@rigol.com

### EUROPE

**RIGOL TECHNOLOGIES EU GmbH**  
 Lindbergh str. 4  
 82178 Puchheim  
 Germany  
 Tel: 0049-89/89418950  
 Email: info-europe@rigol.com

### NORTH AMERICA

**RIGOL TECHNOLOGIES, USA INC.**  
 8140 SW Nimbus Ave.  
 Beaverton, OR 97008  
 Tel: 877-4-RIGOL -1  
 Fax: 877-4-RIGOL -1  
 Email: info@rigol.com

### JAPAN

**RIGOL TECHNOLOGIES JAPAN, LLC**  
 MJ Bldg. 3F, 1-7-4 Minato, Chuou-ku,  
 Tokyo, Japan 104-0043  
 Tel: +81-3-6262-8932  
 Fax: +81-3-6262-8933  
 Email: info-japan@rigol.com

**RIGOL**® is the registered trademark of **RIGOL** Technologies, Inc. Product information in this document subject to update without notice. For the latest information about **RIGOL**'s products, applications and services, please contact local **RIGOL** office or access **RIGOL** official website: [www.rigol.com](http://www.rigol.com)