

RIGOL



DG5000 series Waveform Generators

DG5000 is a multifunctional generator that combines many functions in one, including Function Generator, Arbitrary Waveform Generator, IQ Baseband Source/IQ IF Source, Frequency Hopping Source (optional) and Pattern Generator (optional). It provides single and dual-channel models. The dual-channel model, with two channels having complete equivalent functions and precisely adjustable phase deviation between the two channels, is a real dual-channel signal generator.

DG5000, adopting the Direct Digital Synthesizer (DDS) technology, can provide stable, precise, pure and low distortion signal. The user-friendly interface design and panel layout bring users exceptional experience. Besides, the remote control of the generator can be easily done through different standard configuration interfaces, which provides more solutions for users.


DG5000 series Waveform Generators



► Features and Benefits

- 4.3 inches, 16M true color TFT LCD.
- 350 MHz, 250 MHz, or 100 MHz or 70 MHz maximum sine output frequency, 1 GSa/s sample rate, 14 bits resolution.
- Single/dual-channel models. The dual-channel model supports frequency and phase coupling.
- The 16+2 channels digital output module (optional) together with the analog channel can rebuild the more mixed signals in daily practice.
- Support an external power amplifier (optional) that can be configured online.
- Support frequency hopping(optional) with hopping interval up to 80 ns and arbitrary editing frequency hopping patterns.
- 14 standard waveform functions: Sine,Square,Ramp,Pulses,Noise,Sinc,Exponential Rise,Exponential Fall,ECG,Gauss,Haversine,Lorentz,Dual Tones and DC.
- Rise/Fall Time of the Pulse could be adjusted separately.
- Enable to edit arbitrary waveform up to 512 kpts and output arbitrary waveforms up to 128 Mpts.
- Support AM,FM,PM,ASK,FSK,PSK and PWM modulations.
- Support user-defined IQ vector signal modulation and IQ baseband/IF source output.
- Support Frequency Sweep and Burst output.
- Abundant I/O: waveform output, synchronous signal output, modulation input, 10 MHz clock input/output, trigger input/output.
- Enable to store and recall waveform data and instrument state, and support versatile file types.
Standard configuration with 1 GBytes flash memory.
- Plenty of standard interfaces: double USB Hosts, USB Device, LAN, and GPIB (IEEE-488.2).
- Seamlessly interconnected with RIGOL USB-TMC digital oscilloscopes for loading and reappearing waveforms.
- Support USB flash device storage for FAT files.
- Support PictBridge printer.
- Provide security lock hole.
- Support remote control through 10/100M Ethernet web.
- Conform to LXI-C instrument standards (Version 1.2).
- Provide Chinese and English built-in help and input methods.
- Provide powerful waveform editing PC software.


Advanced functions

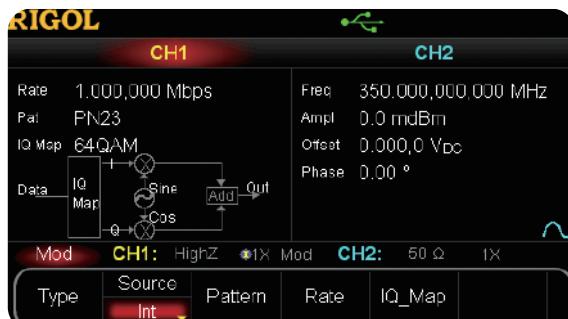

IQ Modulation




Frequency Hopping

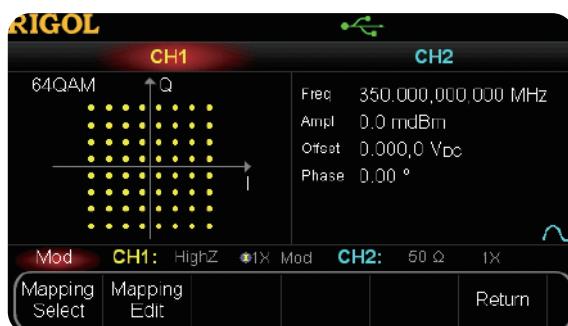

IQ Mapping Selection




IQ Mapping Edit

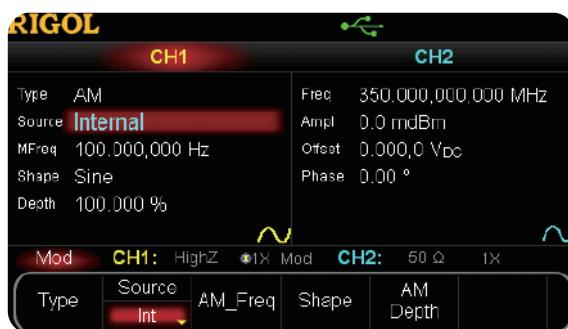

AM



PWM

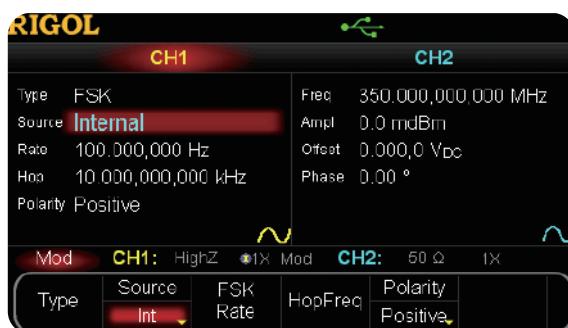


FSK



Burst



Sweep

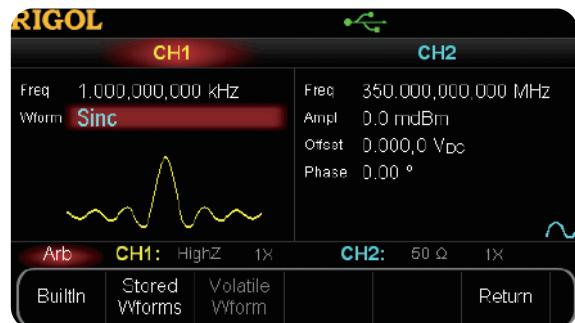

ARB

► Specification

All the specifications can be guaranteed if the following two conditions are met unless where noted.

- The generator is within the calibration and has performed self-calibration.
- The generator has been working continuously for 30 minutes at specified temperature (18°C ~ 28°C).

All the specifications are guaranteed unless those marked with "typical".

Model	DG5352	DG5252	DG5102	DG5072
	DG5351	DG5251	DG5101	DG5071
Channel	2/1	2/1	2/1	2/1
Maximum Frequency	350 MHz	250 MHz	100 MHz	70 MHz
Sample Rate		1 GSa/s		
Waveforms	Sine, Square, Ramp, Pulse, Noise			
Standard Waveforms	Sinc, Exponential Rise, Exponential Fall, ECG, Gauss, HaverSine, Lorentz, Dual-Tone, DC			

Frequency Characteristics				
Sine	1 μHz to 350 MHz	1 μHz to 250 MHz	1 μHz to 100 MHz	1 μHz to 70 MHz
Square	1 μHz to 120 MHz	1 μHz to 120 MHz	1 μHz to 100 MHz	1 μHz to 70 MHz
Ramp	1 μHz to 5 MHz	1 μHz to 5 MHz	1 μHz to 3 MHz	1 μHz to 3 MHz
Pulse	1 μHz to 50 MHz	1 μHz to 50 MHz	1 μHz to 50 MHz	1 μHz to 50 MHz
Noise	250 MHz Bandwidth			
Arb	1 μHz to 50 MHz	1 μHz to 50 MHz	1 μHz to 50 MHz	1 μHz to 50 MHz
Resolution	1 μHz			
Accuracy	±1 ppm, 18 °C to 28 °C			

Sine Wave Spectrum Purity				
Harmonic Distortion	Typical (0 dBm) ≤100MHz: <-45dBc >100MHz: <-35dBc	Typical (0 dBm) ≤100MHz: <-45dBc >100MHz: <-35dBc	Typical (0 dBm) ≤100MHz: <-45dBc	Typical (0 dBm) ≤ 70MHz: <-45dBc
Total Harmonic Distortion	<0.5% (10 Hz to 20 kHz, 0 dBm)			
Spurious (non-harmonic)	Typical (0 dBm) ≤100MHz: <-50dBc >100MHz: -50dBc+6dBc/octave	Typical (0 dBm) ≤100MHz: <-50dBc >100MHz: -50dBc+6dBc/octave	Typical (0 dBm) ≤ 100MHz: <-50dBc	Typical (0 dBm) ≤ 70MHz: <-50dBc
Phase Noise	Typical (0 dBm, 10 kHz deviation)	10 MHz: <-110 dBc		

Signal Characteristics				
Square				
Rise/Fall Time	Typical Value (1Vpp) < 2.5 ns	Typical Value (1Vpp) < 2.5 ns	Typical Value (1Vpp) < 3 ns	Typical Value (1Vpp) <4 ns
Overshoot	Typical Value (1Vpp) < 5%			
Duty Cycle	≤ 10 MHz: 20.0% to 80.0% 10 MHz to 40 MHz: 40.0% to 60.0% > 40 MHz: 50.0% (fixed)			
Non-symmetry	1% of period + 5 ns			
Jitter (rms)	Typical Value (1Vpp) ≤ 30 MHz: 10ppm+500 ps > 30 MHz: 500 ps			

Ramp	
Linearity	≤ 0.5% of peak output
Symmetry	0% to 100%
Pulse	
Period	20 ns to 1000000 s
Pulse Width	4 ns to 1000000 s
Leading/Trailing Edge Time	2.5 ns to 1 ms 2.5 ns to 1 ms 3 ns to 1 ms 4 ns to 1 ms
Overshoot	<5%
Jitter (rms)	Typical Value (1Vpp) 10 ppm+500 ps

Arb	
Waveform Length	Normal Mode: 2 to 16Mpts Play Mode : 2 to 128Mpts
Vertical Resolution	14 bits
Mode	Normal Mode, Play Mode
Sample Rate	Normal Mode (Waveform Length is from 2 to 16Mpts): 1G Sa/s (fixed) Play Mode (Waveform Length is from 2 to 128Mpts): ≤1G Sa/s (variable)
Minimum Rise/Fall Time	Typical Value (1Vpp) ≤3 ns
Jitter (rms)	3 ns
Interpolation Method	Close, Linear, Sinc
Edit Method	Edit Point, Edit Block
Non-Volatile Memory	1G Bytes

Output Characteristics	
Amplitude (into 50 Ω)	
Range	≤ 100 MHz: 5 mVpp to 10 Vpp ≤ 300 MHz: 5 mVpp to 5 Vpp ≤ 350 MHz: 5 mVpp to 2 Vpp
Accuracy	Typical (1 kHz Sine, 0 V Deviation, >10 mVpp, Auto) ± 1% of setting ± 1 mVpp
Amplitude	<10MHz: ±0.1dB
Flatness	10MHz to 60MHz: ±0.2dB
(relative to 100 kHz, 1.25Vpp Sine wave, 50Ω)	60MHz to 100MHz: ±0.4dB
Units	100MHz to 250MHz: ±1.0dB
Resolution	>250MHz: ±1.5dB
Units	Vpp, Vrms, dBm, High Level, Low Level
Resolution	0.1 mV or 4 digits

Offset (into 50 Ω)	
Range	±5 Vpk ac + dc
Accuracy	1% of setting + 5mV + 0.5% of amplitude
Waveform Output	
Impedance	50 Ω (typical)
Isolation	42 Vpk max. to Earth
Protection	Over-temperature protected, Short-circuit protected, Overload relay automatically disables main output

FH Characteristic	
FH Bandwidth	1.5 MHz to 250 MHz 1.5 MHz to 250 MHz 1.5 MHz to 100 MHz 1.5 MHz to 70 MHz
FH Rate	1 Hop/s to 12.5M Hop/s
Frequency Point Numbers	4096
Sequence Length	4096

Modulation Characteristics	
Modulation Types	AM, FM, PM, ASK, FSK, PSK, PWM, IQ

AM				
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)			
Source	Internal/External			
Modulating Waveforms	Sine, Square, Ramp, Noise, Arb (2 mHz to 50 kHz)			
Depth	0% to 120%			
FM				
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)			
Source	Internal/External			
Modulating Waveforms	Sine, Square, Ramp, Noise, Arb (2 mHz to 50 kHz)			
PM				
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)			
Source	Internal/External			
Modulating Waveforms	Sine, Square, Ramp, Noise, Arb (2 mHz to 50 kHz)			
Phase Deviation	0° to 360°			
ASK				
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)			
Source	Internal/External			
Modulating Waveforms	Square with 50% duty cycle (2 mHz to 1 MHz)			
FSK				
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)			
Source	Internal/External			
Modulating Waveforms	Square with 50% duty cycle (2 mHz to 1 MHz)			
PSK				
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)			
Source	Internal/External			
Modulating Waveforms	Square with 50% duty cycle (2 mHz to 1 MHz)			
PWM				
Carrier Waveform	Pulse			
Source	Internal/External			
Modulating Waveforms	Sine, Square, Ramp, Noise, Arb (2 mHz to 50 kHz)			
Width Deviation	0% to 100% of Pulse Width			
IQ				
Carrier Waveform	Sine (max. 200 MHz)	Sine (max. 200 MHz)	Sine (max. 100 MHz)	Sine (max. 70 MHz)
Source	Internal/External			
Code Pattern	PN Sequence, 4 bits code pattern, User			
IQ Mapping	4QAM, 8QAM, 16QAM, 32QAM, 64QAM, BPSK, QPSK, OQPSK, 8PSK, 16PSK, User			
Code Rate	1 bps to 1 M bps			
Burst Characteristics				
Carrier Waveforms	Sine, Square, Ramp, Pulse, Noise, Arb (except DC)			
Carrier Frequency	1 µHz to 120 MHz	1 µHz to 120	1 µHz to 100 MHz	1 µHz to 70 MHz
Burst Count	1 to 1 000 000 or Infinite			
Start/Stop Phase	0° to 360°			
Internal Period	1 µs to 500 s			
Gated Source	External Trigger			
Trigger Source	Internal, External or Manual			
Trigger Delay	0 ns to 85 s			

Sweep Characteristics			
Carrier Waveforms			Sine, Square, Ramp, Arb (except DC)
Type			Linear, Log or Step
Direction			Up or Down
Start/Stop Frequency		1 µHz to 250 MHz	1 µHz to 250 MHz
Sweep Time		1 ms to 300 s	1 µHz to 100 MHz
Hold/Return Time		0 ms to 300 s	1 µHz to 70 MHz
Trigger Source			Internal, External or Manual
Marker			Falling edge of Sync signal (programmable)
Programming Time			
Configuration Times (typical)		USB2.0	LAN
Function Change		500ms	510ms
Frequency Change		50ms	50ms
Amplitude Change		300ms	310ms
Select User Arb		500ms	510ms
Arb Download Times (binary transfer)			1 Mpts/s
Note: Download times do not include setup or output time.			
Trigger Characteristics			
Trigger Input		TTL-compatible	Trigger Output
Level		Rising or falling (selectable)	Level
Slope		> 50 ns	Pulse Width
Pulse Width		Sweep: <100 ns (typical)	Maximum Rate
Latency		Burst: <300 ns (typical)	Clock Reference
External Reference Input			Phase Offset
Lock Range			Range
Level			Resolution
Lock Time			0° to 360°
Internal Reference Output			0.001°(arb waveform),
Frequency			0.03° (other waveforms)
Level			External Reference Input
632 mVpp (0 dBm), nominal value			Lock Range
Sync Output			Level
TTL-compatible			Impedance
50 Ω, nominal value			Sync Output

General Specifications	
Power	
Power Voltage	100-127 V, 45-440Hz 100-240 V, 45-65Hz
Power Consumption	Less than 125 W
Fuse	250V, T3A
Display	
Type	4.3-inch TFT LCD
Resolution	480 Horizontal × RGB × 272 Vertical Resolution
Color	16 M color
Environment	
Temperature Range	Operating: 10°C to 40°C Non-Operating: -20°C to 60°C
Cooling Method	Cooling by fans compulsively
Humidity Range	Less than 35°C: ≤90% Relative Humidity (RH) 35°C to 40°C: ≤60% Relative Humidity (RH)
Altitude	Operating: Less than 3000 meters Non-Operating: Less than 15000 meters
Mechanical	
Dimensions (W×H×D)	230 mm × 106 mm × 501 mm
Weight	with no package: 4.3 kg with package: 5.84 kg
Interfaces	USB Host (2), USB Device, GPIB, LAN
IP Protection	IP2X
Calibration Interval	Recommend 1 year for standard interval

► Ordering Information

	Description	Order Number
Model	DG5352 (350 MHz, dual-channel) DG5351 (350 MHz, single channel) DG5252 (250 MHz, dual-channel) DG5251 (250 MHz, single channel) DG5102 (100 MHz, dual-channel) DG5101 (100 MHz, single channel) DG5072 (70MHz, dual-channel) DG5071 (70MHz, single-channel)	DG5352 DG5351 DG5252 DG5251 DG5102 DG5101 DG5072 DG5071
Standard	Power Cord	-
Accessories	USB Cable BNC Cable (1 meter) Quick Guide (Hard Copy) Resource CD (including User's Guide and Application Software) SMB(F) to BNC(M) Cable (1 meter)	CB-USB CB-BNC-BNC-1 - -
Options	Frequency Hopping Module Logic Signal Output Module	CB-SMB(F)-BNC(M)-1 DG5-FH DG-POD-A
Optional	Power Amplifier SMB(F) to SMB(F) Cable (1 meter) SMB(F) to BNC(F) Cable (1 meter)	PA1011 CB-SMB(F)-SMB(F)-1 CB-SMB(F)-BNC(F)-1
Accessories	40 dB Attenuator Rack Mount Kit	ATT-40dB RMK-DG-5



HEADQUARTER

RIGOL TECHNOLOGIES, INC.
 No.156,Cai He Village,
 Sha He Town,
 Chang Ping District, Beijing,
 102206 P.R.China
 Tel:+86-10-80706688
 Fax: +86-10-80705070
 Electronic Measurement
 Instrument service and support
 email:EMD_support@rigol.com
 Chemical Analysis Instrument
 service and support email:service.
 chem@rigol.com

EUROPE

RIGOL TECHNOLOGIES GmbH
 Lindbergh str. 4
 82178 Puchheim
 Germany
 Tel: 0049- 89/89418950
 Email: info-europe@rigoltech.com

NORTH AMERICA

RIGOL TECHNOLOGIES,
 USA INC.
 10200 SW Allen Blvd, Suite C
 Beaverton, OR 97005, USA
 Toll free: 877-4-RIGOL-1
 Office: (440) 232-4488
 Fax: (216)754-8107
 Email: info@rigol.com

JAPAN

RIGOL TECHNOLOGIES JAPAN G.K.
 Tonematsu Bldg. 5F, 2-33-8 Nihonbashi-
 Ningyocho, Chuo-ku,
 Tokyo 103-0013
 Japan
 Tel: +81-3-6264-9251
 Fax: +81-3-6264-9252
 Email: info-japan@rigol.com

INDONESIA

PT. UNITRONIC JAYA
 Jl. Batununggal Indah IV No. 75,
 Bandung 40266 Jawa Barat Indonesia
 Tel : +62 - 22 - 7514564
 Fax : +62 - 22 - 7538688
 Email : sales@unitronicjaya.com
 Web : www.unitronicjaya.com

RIGOL® is the registered trademark of **RIGOL** Technologies, Inc. Product information in this document subject to update without notice. For the latest information about **RIGOL**'s products, applications and services, please contact local **RIGOL** office or access **RIGOL** official website: www.rigol.com